

Industrial Wireless Access Point PoE Gateway

JetWave 2714G-WIFI Series



Industrial Access Point + 4GT Gigabit PoE Switch

- 5.8G 802.11ac/2.4G 802.11n
- 4xGigabit 802.3at PoE ports
- IEEE 802.3at Power Source Equipment, up to 30W per port, Link Partner Detection Protocol, Power budget control, PD Auto Reset
- Rapid Super Ring(RSR), 256 VLANs and QoS, can be integrated with our Managed Switch
- OPCuA for Industrial M2M Communication, SNMPv2c/v3 for NMS, LLDP, Mobile IP Management
- Dual DC 48V(standard model), 12-36V(Booster model), -40-70°C operating temperature



Gigabit



PoE
802.3at PoE



802.11ac



RSR Ring

Overview

The product is an industrial grade wireless Access Point with multiple PoE Ethernet Ports. The product equips with 5.8G 802.11ac/2.4G 802.11n , 4 Gigabit 802.3at PoE Ports supports up to 30W power source to power devices.


The LAN switch ports supports wire speed switching, Rapid Super Ring (RSR), 256 VLANs, QoS traffic prioritizing and can be integrated with the industrial Managed Switch.

The OPC UA is designed for industrial M2M communication, a popular protocol for industrial automation and M2M applications.


The product supports Dual DC 48V(standard model), 12-36V(Booster model), Digital Output and -40-70°C wide operating temperature.

Model Name	4G LTE	WIFI	Ethernet	USB/DO /COM	SIM	Power	Operating Temp.
JetWave 2714G-WIFI-E	-	5G/2.4G 802.11ac/n	4xGT 802.3at PoE	1xDO	-	48V	-40-70°C
JetWave 2714G-WIFI-U	-	5G/2.4G 802.11ac/n	4xGT 802.3at PoE	1xDO	-	48V	-40-70°C
JetWave 2714G-WIFI-E-B	-	5G/2.4G 802.11ac/n	4xGT 802.3at PoE	1xDO	-	12-36V	-40-70°C
JetWave 2714G-WIFI-U-B	-	5G/2.4G 802.11ac/n	4xGT 802.3at PoE	1xDO	-	12-36V	-40-70°C

Appearance

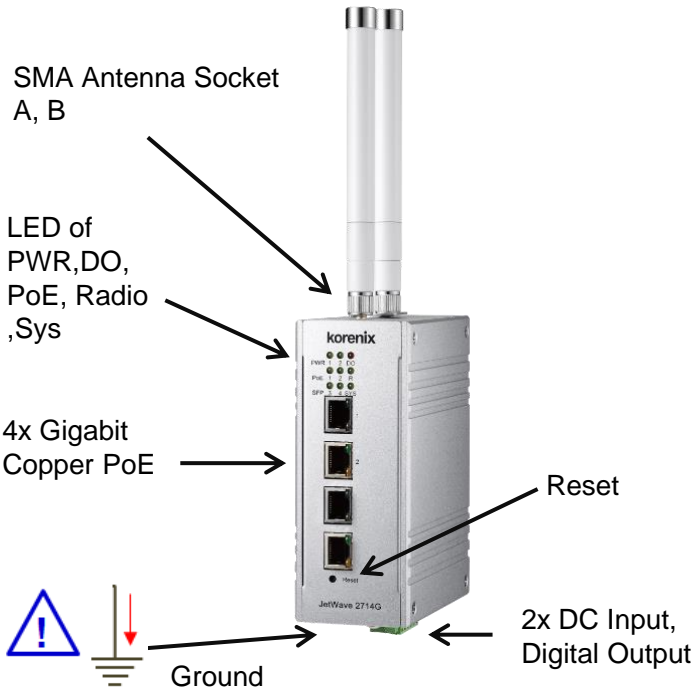

Dimension

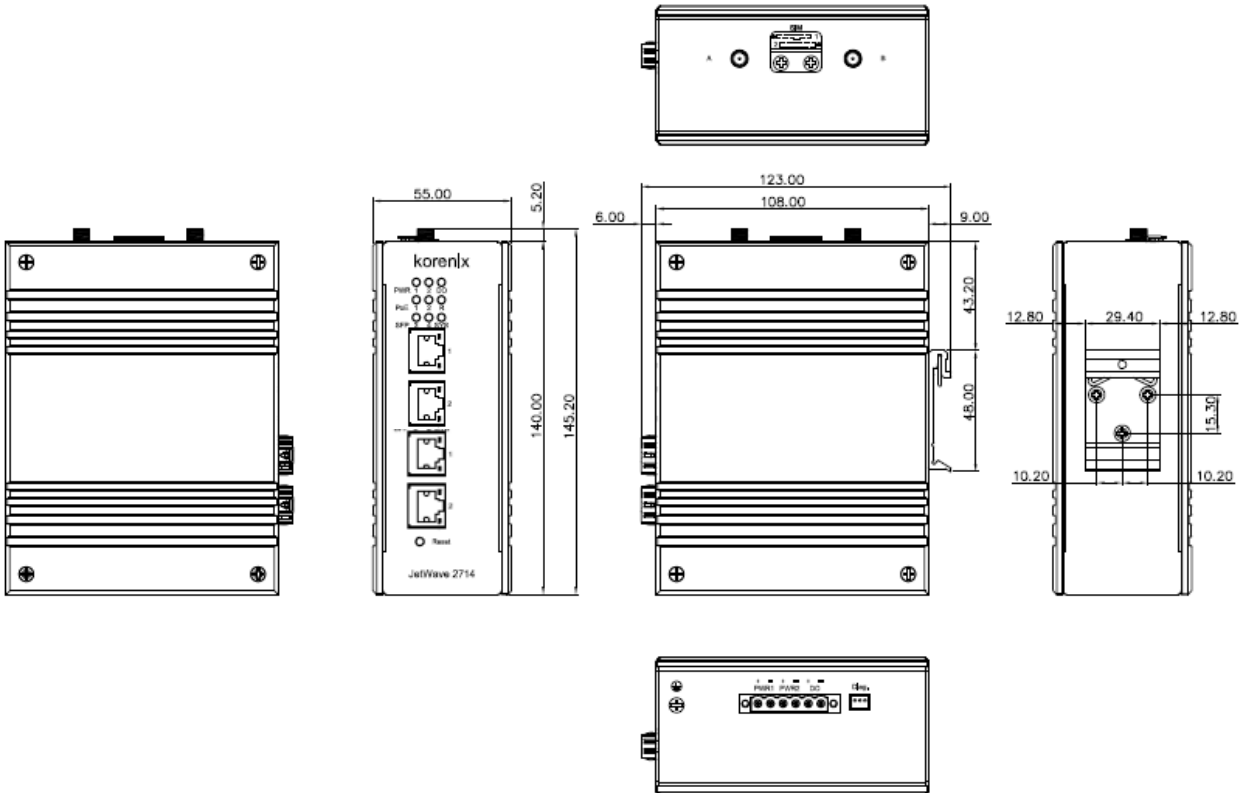

Specification

Technology	
Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 10/100Base-TX, IEEE 802.3ab for 1000BaseT, IEEE 802.3z Gigabit Ethernet IEEE 802.3af 15.4W / IEEE 802.3at 30W High Power PoE+ IEEE 802.1Q VLAN, IEEE802.1p Class of Service, IEEE 802.1D-2004 Rapid Spanning Tree Protocol
Interface	
Ethernet Port - RJ-45	4x 10/100/1000Base-T(X) RJ-45 IEEE 802.3af 15.4W / IEEE 802.3at 30W High Power PoE with 60W Total Power Budget
Ethernet Port - Capacity	Switching: Store and Forward or Cut-Throughput Non-blocking Switching Performance, 1Mbit on-chip memory. Throughput: 14,880pps for 10M, 148,800pps for 100M, 1,488,100pps for Gigabit Ethernet Port Packet Size: Typical 64-1522 bytes and up to 10K Jumbo frame MAC Table: 8K MAC Address table with automatic learning and aging
Console	3-pin Diag. socket
Wireless	WiFi: Dual Band 5G 802.11ac/2.4G 802.11n 2T2R MIMO *See below detail Radio specification
Power Input / Output	Input Dual DC 48V(standard model), 12-36V(Booster model) Output PSE Mode A: 1, 2, 3, 6(A) and DO (2-pin) output
Relay Output	1xRelay Output, 1A@24VDC for LAN/Power Failure
Reset	Reset Switch, Reset to Default over 7 seconds
LED	System: PWR, Radio 1, DO, POE Ethernet Copper Port Link/Speed LED, Ethernet Link/Act LED
SMA Antenna Socket	2x SMA Female Reverse
WIFI	
Standard	5G 802.11ac/2.4G 802.11n Software Selectable
Operating Frequency	FCC : 2.412-2.462GHz, 5.180 ~ 5.240GHz, 5.725-5.825 GHz CE : 2.412-2.472GHz, 5.180 ~ 5.240GHz, 5.500 ~ 5.700 GHz (Programmable for different country regulations)
MIMO	2T2R
RF Modulation	802.11g/n: OFDM (BPSK,QPSK,16QAM,64QAM, 256QAM)
RF Output Power	2.4G 11n 20/40MHz: up to 21dBm; 5G 11ac/n 20/40/80MHz: up to 19dBm <20dB EIRP for CE (ETSI 300 328, include 4.6/3.5dBi default antenna)
RF Sensitivity	2.4G 11n 20/40MHz: -70~-94dB, 5G 11ac/n 20/40/80MHz: -60~-90dB (Check User Manual)
Attached Antenna	5G 4.6dBi/2.4G 3.5dBi omin-direction, -40~85°C temperature, RP SMA Plug, White Color

Management	
Management	Web GUI, Telnet, SNMP, IP Setup, Management VLAN ID, Configuration Backup/Restore, Firmware Upgrade, Reload Default, Ping, DO Events, DO Alarms, SNTP.
WLAN Setup	Multiple SSID, Radio on/off, SSID Broadcast, Frequency selection, VLAN ID, Advanced Settings, Traffic Shaping, Link Fault Pass-Through(Link Integration)
Router/Gateway	NAT Routing, DHCP Server/Client
L2 Switch	IEEE 802.1Q VLAN, max. 256 VLANs, Quality of Service for traffic prioritizing, Link Layer Discovery Protocol, IGMP Snooping, Port Security
PoE Control	Port/System Budget control, operation mode, PoE Scheduling, Link Partner Link Detect
Redundancy	Rapid Super Ring (RSR), RSR Redundant Gateway, Virtual Router Redundancy Protocol (VRRP), Rapid Spanning Tree Protocol
SNMP	Simple Network Management Protocol v1/v2c/v3, Function-based MIB, SNMP Trap
Status & Log	System Information, ARP Table, DHCP Client List, System Event Log
OPCuA	OPCuA for Industrial M2M communication
Utility/NMS	Korenix View, Network Management System (Web Download)
Security	
Secured Access	HTTPS, SSH, TACACS+, IEEE 802.1X,Radius Server
Firewall	Firewall Setting, DMZ, Port forwarding
VPN	IPSec, OpenVPN
Power Requirement	
Power	Dual DC 48V(standard model), 12-36V(Booster model) for 802.3at PoE
Power Consumption	Standby Mode: 6W (Power on only) Full Load: Max. 66 Watts *Suggest to reserve 15% tolerance power in practical installation.
Mechanical	
Enclosure	Aluminum housing
External Antenna	2x Reverse SMA Female connector, Nylok anti-loosen paste
Mounting	Din-Rail
Dimension	140 mm(H) x 115 mm(D) x 55mm(W)
Weight	975g with package
Environmental	
Operating Temp./ Humidity	-40 - 70°C / 5% - 95%
Storage Temperature	-40 - 85 °C
Approvals	
Certification	RED: CE EN55022/55024 EN 61000-6-2/4 Industrial Environment EN 301 489-1/17/52 EN 301893 V2.1.1, EN 300 328 V2.1.1 (WIFI) EN50385/EN62311 MPE assessment EN50121-4 Safety EN60950-1 FCC Part 15C/15E;, SSA-JW1223 (WIFI)
Warranty	5 years
Ordering Information	
JetWave 2714G-WIFI-E	Industrial 802.11ac WIFI + 4GT PSE Wireless PoE Gateway, 5G 11ac/2.4G 11n
JetWave 2714G-WIFI-U	Industrial 802.11ac WIFI + 4GT PSE Wireless PoE Gateway, 5G 11ac/2.4G 11n
JetWave 2714G-WIFI-E-B	Industrial 802.11ac WIFI + 4GT PSE Wireless PoE Gateway, 5G 11ac/2.4G 11n Booster 12-36VDC
JetWave 2714G-WIFI-U-B	Industrial 802.11ac WIFI + 4GT PSE Wireless PoE Gateway, 5G 11ac/2.4G 11n Booster 12-36VDC
Includes	Product Unit, Quick Installation Guide, Safety Instruction Default Antennas: 2xWIFI(White Color) *Please download user manual, View/Mobile Manager utility from Korenix Web Site